


A+ Inward FR Window

ALUFLAM[®]
GROUP
ALUK[®]

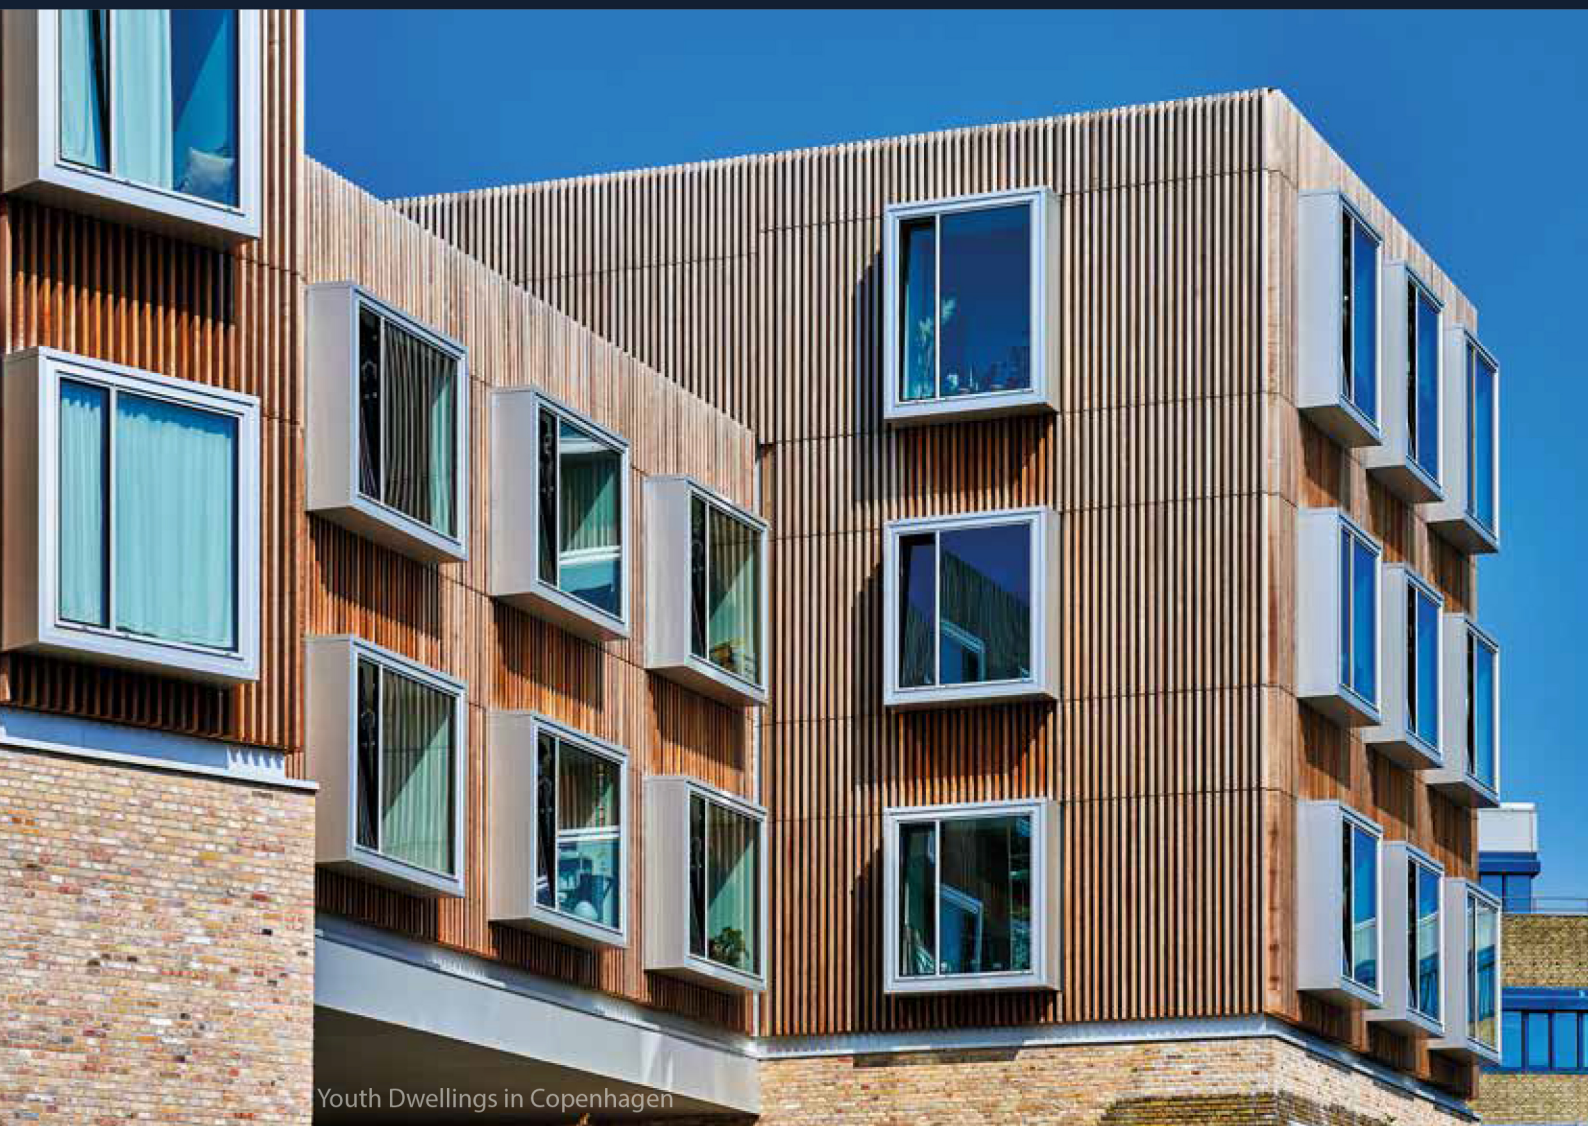

Inward Opening Fire-Rated Window

ALUFLAM is proud to present a new window system with an exceptionally low profile that opens inwards.


The profile height of 54 mm ensures not only lightness and aesthetics but also full coherence with all other products of the A+ family. This system complies with the EI60 classification for both sides, internal and external.




Inward opening fire-rated window from the A+ family

- **Visual effect** – narrow window frame with 54 mm sightline ensures full visual and system compatibility with all other A+ family products
- **Universal installation** – the possibility of installation as a single window in the wall construction and as an element of the facade system
- **Numerous frame depths** – wide palette of frame profiles with different depths and types of sightline: flat and bevel
- **Opening** - inward, tilt & turn
- **Operating** - manual, automatic
- **Sound reduction** - up to 42 dB
- **Surface finishing** - powder coating (RAL, NCS), anodizing

Window

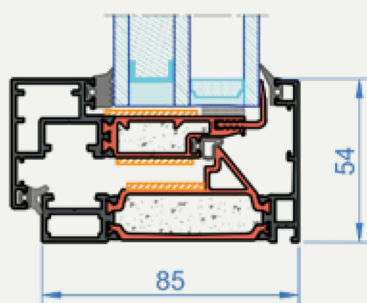

Facade window (example with facade AW50)

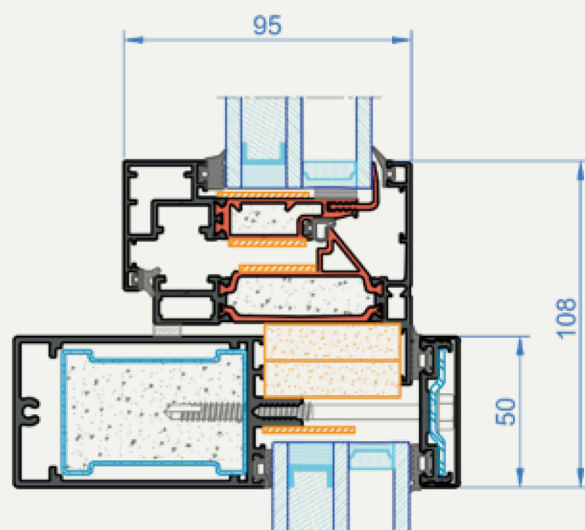

Fire resistance	EW60, EI60 (internal & external side)
Tested glass	5mm ESG / 25mm Fireblock 60
Maximal size	1244 x 1104 mm
Minimal size	700 x 700 mm
Frame depth / Sightline	85, 95, 149, 159, 174 mm / 54mm
Maximal glazing thickness	48 mm
Functionality	windows

ALUK[®]

Projects Team
Projects.uk@aluk.com
+44 (0) 7814 181 823

National Showroom
AluK (GB) Ltd
Newhouse Farm Ind Est
Chepstow
NP16 7DJ

ALUFLAM[®]

GROUP