

Double Door AF70 FR



DTU in Kongens Lyngby

Fire Rated Door


ALUFLAM AF70 glass fire doors are high performance, thermally broken narrow aluminium frames with its cavity filled with patented fire retardant cooling core.

Incorporating extensively tested fire resistant glazing, the AF70 door system can be used internally up 60 minute fire




- Clean, sharp lines of narrow stile aluminium
- Large glass areas
- Easily integrated into large shopfront, glass partition or curtain wall
- Can be installed with ease in masonry or plasterboard fire wall
- High impact resistance
- Energy efficient
- Incorporates high quality commercial door hardware for both, interior and exterior installation
- Sound reduction - up to 39 dB

Frame / Door

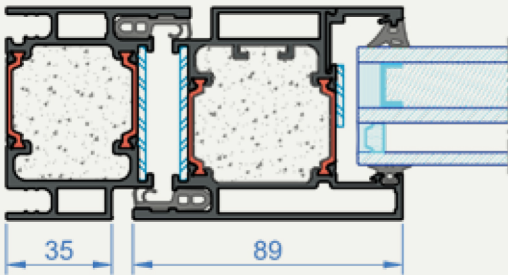

Transom

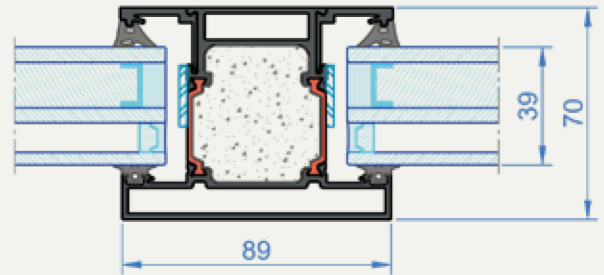

Fire resistance	EI30 - EI60
Tested glass	Contraflam 60, Fireblock 30-60
Maximal size	1200 x 2050 mm (per glass field)
Minimal size	700 x 700 mm
Frame depth / Sightline	70 mm / 89 mm
Maximal glazing thickness	38 mm
Functionality	single, double doors, partitions

ALUK[®]

Projects Team
Projects.uk@aluk.com
+44 (0) 7814 181 823

National Showroom
AluK (GB) Ltd
Newhouse Farm Ind Est
Chepstow
NP16 7DJ

ALUFLAM[®]

GROUP